SRIKEKL 1080P Body Cameras with Audio and Video, Support 5-6 Hours Recording, WIFI Hotspot,Mini Body Cam for Daily Record, Indoor/Outdoor, Law Enforcment(64GB)

【1080P Pocket Camcorder& 180° rotatable lens】The body camera records clear 1080P HD video footage. Enjoy Full HD recording capabilities and rest assured during the night time 4pcs LED Infrared lights that capture clear footage up to 5m/16ft away in pitch-black darkness.The 180° rotatable lens allows you to adjust the angle of video shooting at will.

- 【Working Status Icon & Easy button operation】This wearable body camera can display different icons in different working states. The buttons for recording video and recording sound are independent.One-button operation is very convenient.
- 【Come with 64G Memory&7 Hours Long Recording Time】The body worn camera comes with 64GB storage for all your video, picture recordings(Support Max 256GB),1000mAh battery record footage for up to 7 hours in a row(1080P& infrared lights&WIFI Off). Perfect for Riding, Meeting Record, home
- 【WIFI Hotspot Function】The WIFI bodycam supports managing files, and changing settings on the smartphone side. Connect the wearable body camera to your phone anytime, anywhere to get a quick playback. (APP: "sports camera")
- 【Detachable Clip&loop recording 】 The CS05 body cameras with a light weight design,equipped with a clip for installation, easy to install and remove.our body cameras automatically overwrites the oldest recordings and cycles new footage.The wearble camera can be used at home, in the office, in the warehouse,in the corner of the backyard or the store, or even as a car camera, meets your different requirements.

Manufacturer: SRIKEKL **Part Number**: YJ59RBR **Isin**: IZPFRZCRYO6E

Ad Download to read ad-free

Product illustration

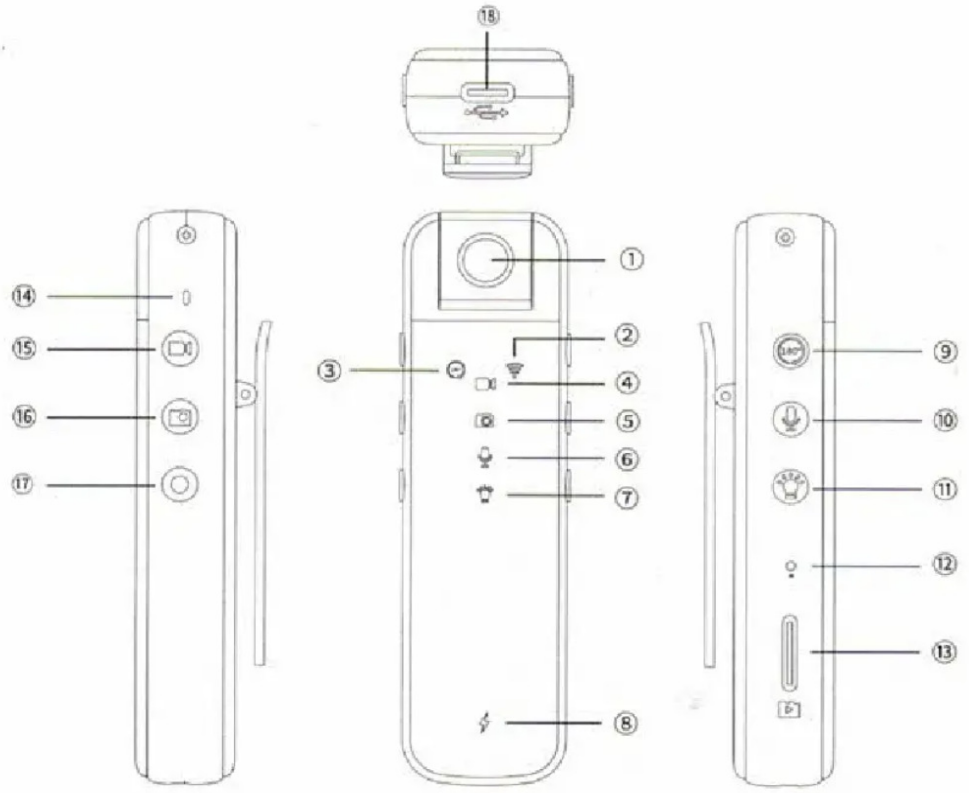

① Hd lens ② WiFi indicator light ③ Turn-over indicator

④ Video indicator ⑤ Camera indicator ⑥ Recording indicator

⑦ Night vision indicator light ⑧ Charging indicator light

⑨ Flip key ⑩ Recording key ⑪ Night vision key

⑫ Reset key ⑬ TF card slot ⑭ Microphone hole

⑮ Video key ⑯ Photo button ⑰ Power key

⑱Charging interface

Mode of use

The lens of this product can be rotated 180°, and the Angle can be adjusted according to requirements during use, as shown in the figure:

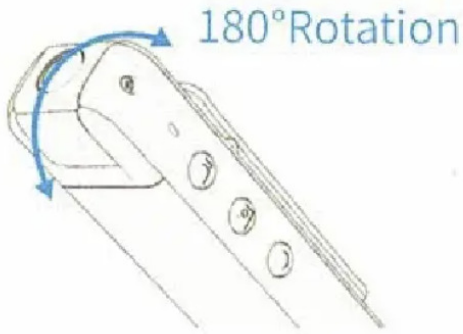

Installing a TF card

① Insert TF card as shown in figure
② Please use the original TF card
③ Support 4-256G, C10 high-speed card

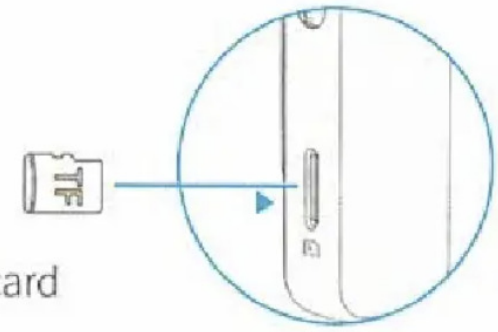

Use tutorial

(1) Key description

Power key		Long press	Long press to turn on, and long press again to turn off.
Photo button		Short press	Tap to enter photo mode. Tap photo mode one photo at a time.
Video key		Short press	Press to enter the recording mode, and press to start recording. Short press to stop recording in recording mode. Press to exit motion detection in motion detection state.
Motion detection		Long press	Press and hold in video mode to enable motion detection.
Night vision key		Short press	Press to turn on the red light and press to turn off the red light when on.
Recording key		Short press	Tap to enter recording mode. Tap to start recording in recording mode. Tap to stop recording in recording mode.
			recording mode.
Flip key		Short press	Short press to turn the image over 180°, and short press to turn the image over 180° when on.
WiFi on and off		Long press	Hold down to enable hot WiFi, and hold down to disable hot WiFi when WiFi is enabled.

(2) Indicator description

Video indicator		Steady on: Video standby mode; fast blinking: motion detection standby mode; slow blinking: video recording; blinking for three times to shut down the device.
Camera indicator		When the camera is in standby mode, blink to take a picture.
Recording indicator		Steady on the recording is in standby mode, and the slow blinking is recording.
Night vision indicator light		Steady on Turn on the red light and turn off the red light.
WiFi indicator light		Steady on On hot WiFi and off on hot WiFi.
Turn-over indicator		When it is on, the image is flipped 180°. When it is off, the image is closed flip it 180 degrees.
Charging indicator light		Steady on is charging, turn off battery full.

(3) Basic operating instructions

① Power on

Press and hold the " ⏻ " key to power on. If there is a card, directly enter the recording standby mode, and the recording light is always on. After 8 seconds without a card, the video lamp will flash three times and automatically shut down.Standby with card without using any functions. The blue light flashes 3 times in 1 minute and then automatically shuts down(when the hotspot WiFi is turned on, it will not automatically shut down).

② Shutdown

In any mode of powering on, long press the " ⏻ " key and the video lamp flashes three times before turning off.

③ Recording

In recording mode, briefly press the " 📹 " key to indicate a slow flash to start recording, and in recording mode, briefly press the " 📹 " key to stop recording.

④ Motion detection

In video recording mode, long press the" 📹 " key to enter the motion detection video recording mode, and the indicator light flashes quickly. If an object movement is detected, the indicator light flashes slowly to start recording. If an object movement is

④ Motion detection

In video recording mode, long press the" " key to enter the motion detection video recording mode, and the indicator light flashes quickly. If an object movement is detected, the indicator light flashes slowly to start recording. If an object movement is detected, record for 1 minute at a time, and if a continuous object movement is detected, record for 5 minutes in segments. Short press the " " key to exit the motion detection video recording mode.

⑤ Take a photo

In the photo mode, briefly press the " " key to flash the indicator light and take a photo.

⑥ Recording

In recording mode, briefly press the " " key to indicate a slow flash to start recording, and in recording mode, briefly press the " " key to stop recording.

⑦ Image Flipping

The default orientation of the image is the back clip direction. If you need to rotate the lens for shooting, please briefly press the " " key to adjust the image. The 180 ° indicator light is always o

⑧ Night vision

Video recording, photo taking, detection, WiFi standby mode, short press the " " key to turn on night vision,and the night vision indicator light will be on; When turning on night vision, briefly press the " " key again to turn off the night vision indicator light and turn it off.

APP download and installation

Scan the QR code below to download and install "Sports Camera", or search for "Sports Camera" in Google Play or App Store to download and install.

Android IOS Google

Hotspot WiFi

(1)WiFi switch

① Turn on WiFi

Turn on WiFi without card, long press " " button to turn on WiFi indicator light within 8 seconds when the blue light is on; Turn on WiFi if there is a card, and long press " " button to turn on WiFi indicator light in standby mode of video recording and photo taking.

②Turn off WiFi

When WiFi is on, hold down the " " button to turn off the WiF indicator.

(2)WIFI connection

The WIFI setting of the mobile phone or tablet computer searches for networks with a connection name of "CS started (listed as CS05_CE01)". After the connection is successful, open the Sports Camera App to enter the main interface point " ▶ " to enter the real-time preview interface. In the preview interface, you can alsc select video recording/photographing by using the machine

buttons. If you encounter other issues during operation, please click the main interface to help view them.

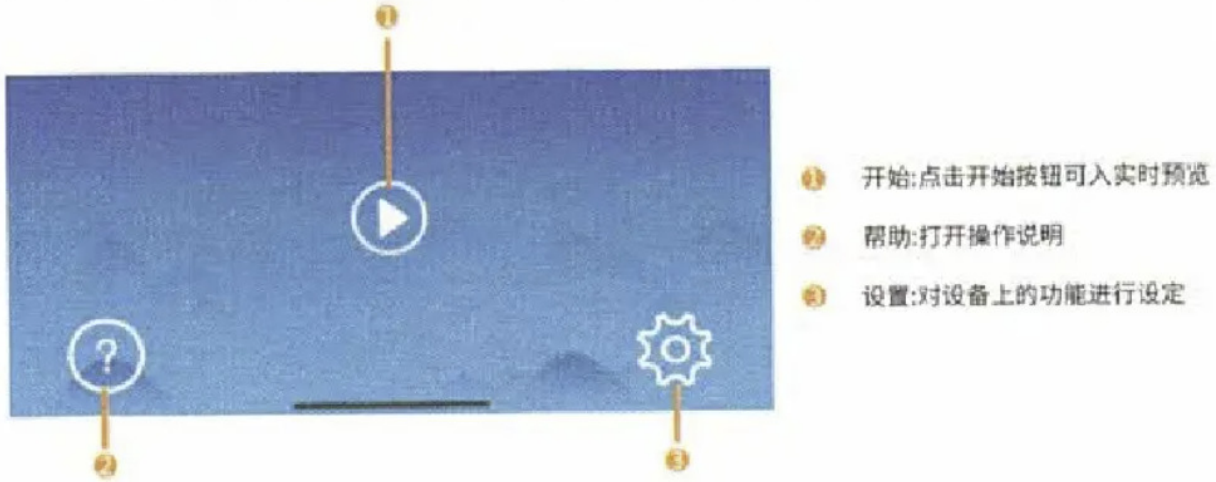

Time setting

After the device connects to WiFi and enters the APP, it will automatically synchronize the time. You can set the time watermark on or off in the APP.

Connect to a computer

In any mode, you can directly connect to the computer, and the computer will pop up a removable disk identifier, which can be used as a USB disk for data transmission, copy, paste, delete and format files.

Resetting

The machine crashes and the buttons are invalid, making it unable to use properly. Press the " R " button to reset the machine and it can be used normally after resetting.

Charging

The charging red light is on, and the full red light is off. Charging can be pressed to enter any mode.

Suggestion : Try not to use the function while charging, it may cause battery and TF card damage!

Remarks

① After the battery is used up, it takes about 2 to 3 hours to recharge;

Note: Charge the battery as much as possible for 20 minutes to ensure that the battery is fully saturated.

② Because this product is a high-definition recorder, the power consumption of the product is larger than that of Puqing. It is normal for the product to appear fever when it is used, not caused by the product itself. This product is shipped after strict testing, please rest assured to use.

Matters needing attention

Application

Please strictly abide by the relevant laws of the country where the product is used Any illegal use, or else there will be consequences.

Operating temperature

Please use in natural temperature, do not use in human body can not adapt to the temperature.

Working humidity

Please use it in the humidity suitable for human environment. Do not put the product in the humid environment. This product does not have the waterproof function, so avoid drenching or exposure to rain.

Shooting requirements

Use the camera in an environment with sufficient light sources. Do not point the camera directly at strong light sources such as the sun to avoid damage to optical components.Such as strong light source, so as to avoid damage to optical devices.

Cleaning requirements

Do not use in an environment with too high dust density to avoid dust contamination of the lens and other components, which may affect the camera effect.(In case of fingerprints or dust on the lens, please use clean soft material dust-free cloth to wipe).

Correlation parameter

Project	Relative parameter number
Video resolution	1920*1080P
Video format	AVI
Video frame rate	25fps
Image ratio	16:9
Recording format	wav
Photo resolution	4032*3024P
Photo format	JPG
Battery type	Built-in high capacity polymerized lithium battery
Battery capacity	1000mAh
Working time	Sustainable video recording for 5 hours
Charging voltage	DC-5V
Storage support	Supports up to 256G Micro SD card
Interface type	Type-C
Lens adjustment	180°
Support system	Windows ; Mac Os ; Linux
Playback software	System or mainstream audio and video player software

FCC WARNING

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) this de vice may not cause harmful interference.
(2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equip generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interfer nce to radio comm. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following

measures:

measures:
-- Reorient or relocate the receiving antenna.
-- Increase the separation between the equipment and receiver.
-- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
-- Consult the dealer or an experienced radio/TV technician for help.

To maintain compliance with FCC' s RF Exposure guidelines, This equipment should be installed and operated with minimum 20cm distance between the radiator and your body: Use only the supplied antenna.

Lens adjustment	180°
Support system	Windows ; Mac Os ; Linux
Playback software	System or mainstream audio and video player software

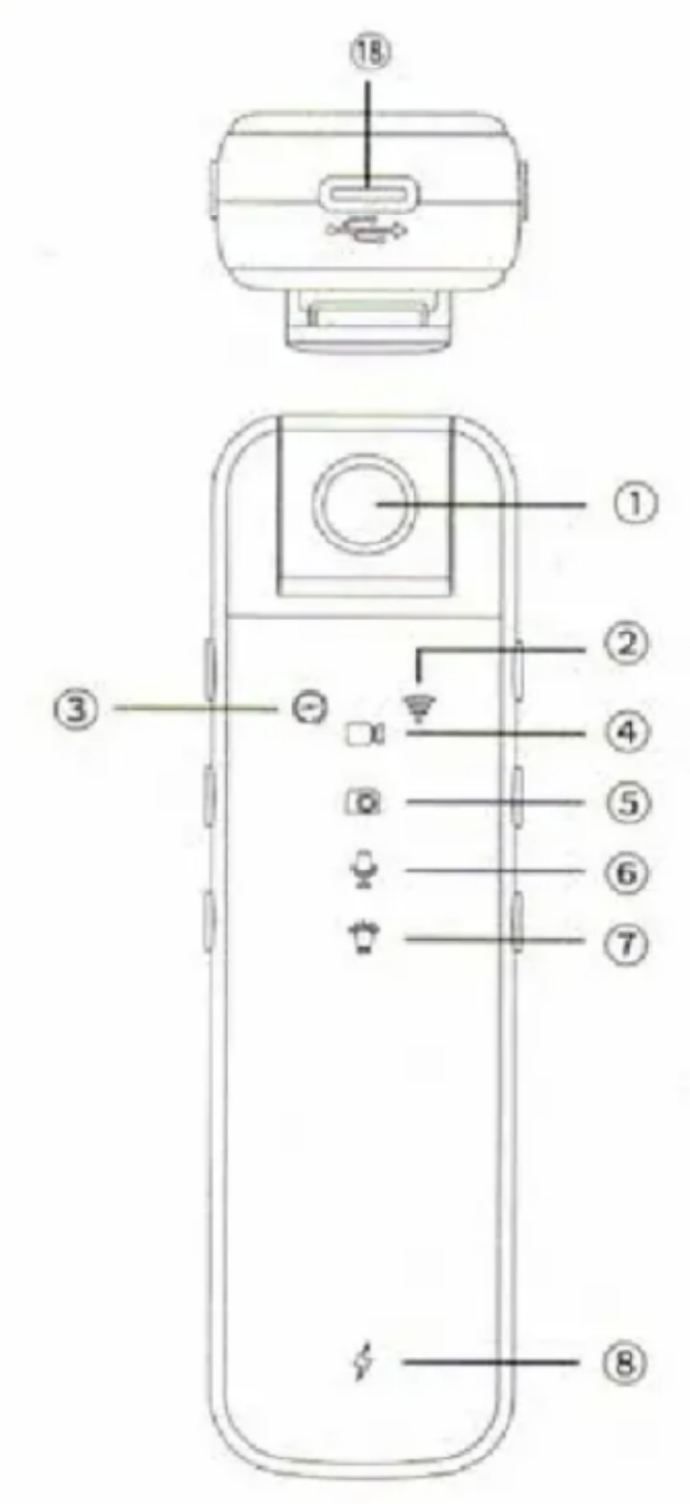

18 Charging indicator

HD Lens

WiFi indicator light

Video indicator

Camera indicator

Recordiing indicator

Night vision
indicator light

Chargin indicator light

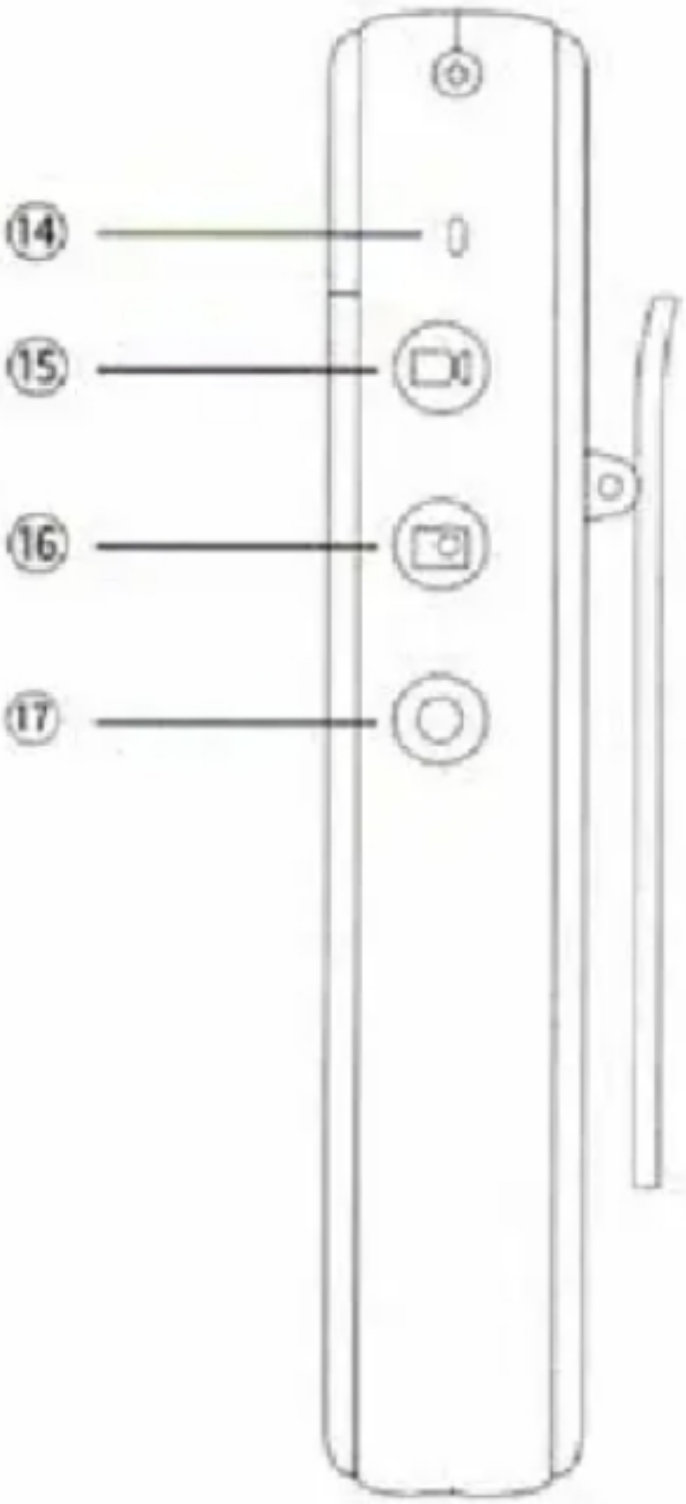
14
15
16
17

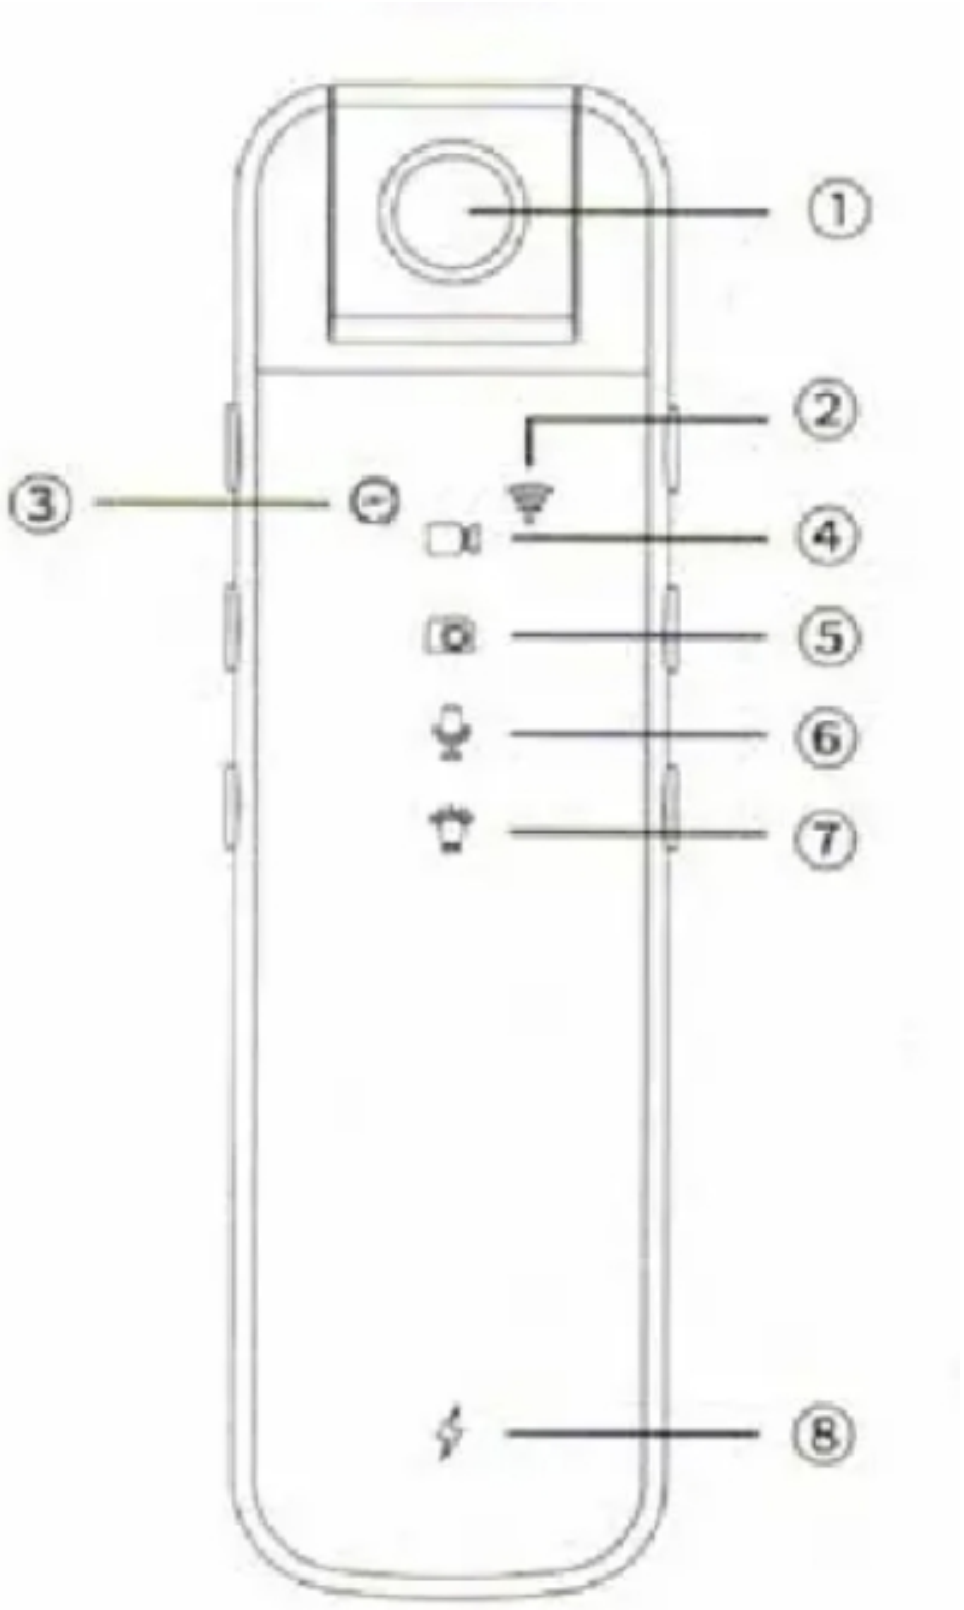
①
②
③
④
⑤
⑥
⑦
⑧

fffff
f
f

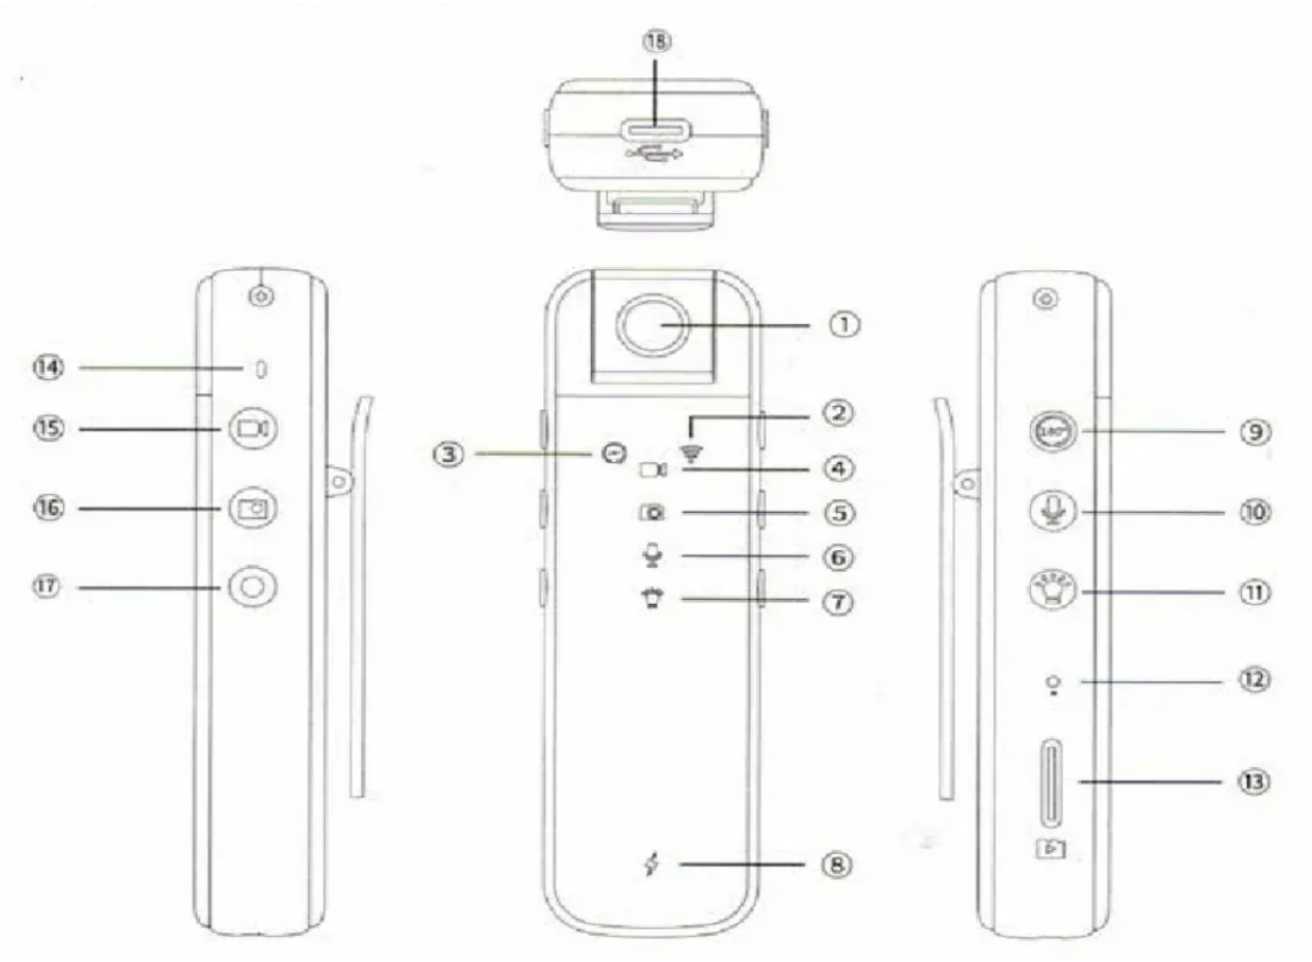

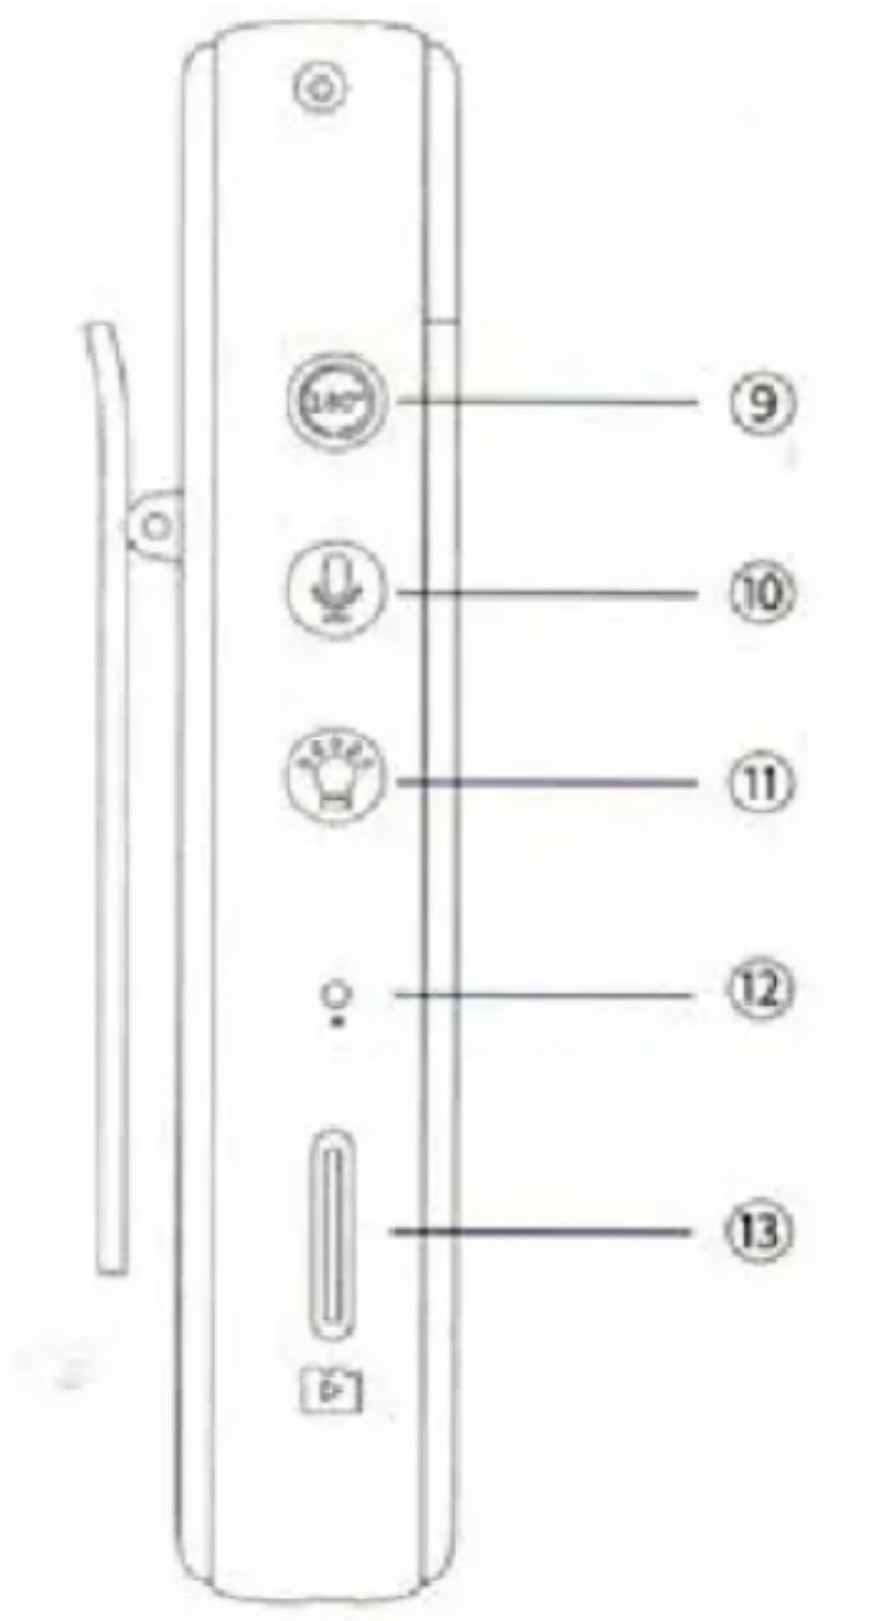
9
10
11
12
13

① Hd lens ② WiFi indicator light ③ Turn-over indicator

④ Video indicator ⑤ Camera indicator ⑥ Recording indicator

⑦ Night vision indicator light ⑧ Charging indicator light

⑨ Flip key ⑩ Recording key ⑪ Night vision key

⑫ Reset key ⑬ TF card slot ⑭ Microphone hole

⑮ Video key ⑯ Photo button ⑰ Power key

⑱Charging interface

Ad Download to read ad-free

Product illustration

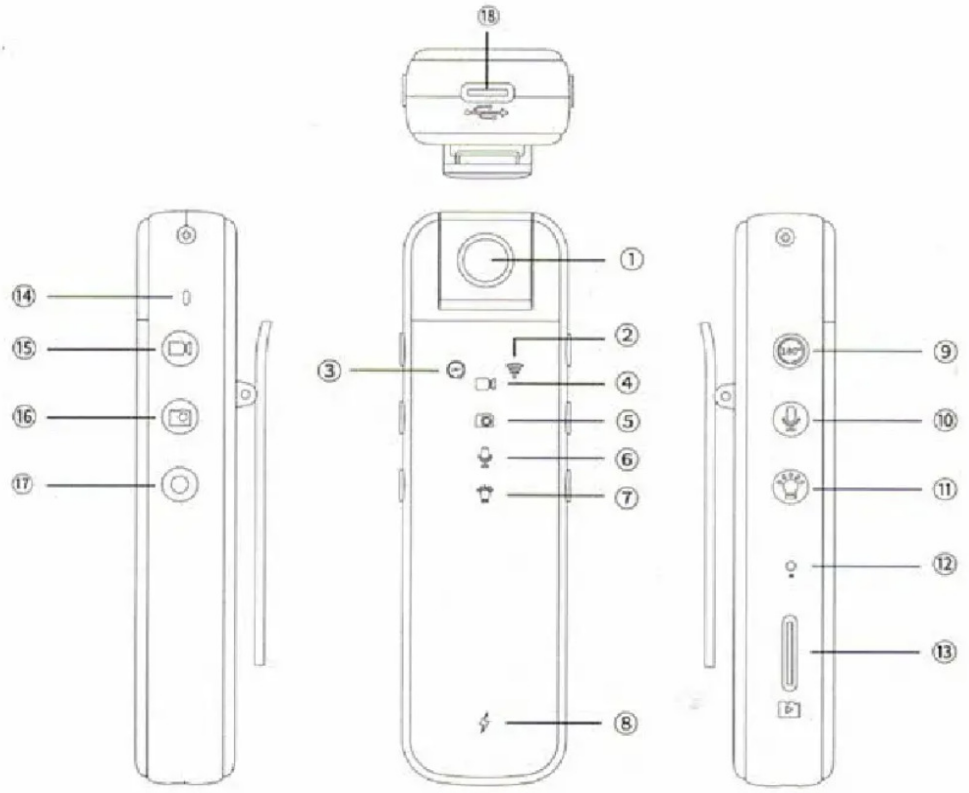

① Hd lens ② WiFi indicator light ③ Turn-over indicator

④ Video indicator ⑤ Camera indicator ⑥ Recording indicator

⑦ Night vision indicator light ⑧ Charging indicator light

⑨ Flip key ⑩ Recording key ⑪ Night vision key

⑫ Reset key ⑬ TF card slot ⑭ Microphone hole

⑮ Video key ⑯ Photo button ⑰ Power key

⑱Charging interface